



LFX™ Low Flow Sprinkler; High efficiency with unparalleled operational flexibility.




LFX300

For low-volume irrigation in under-tree or overhead configurations; the LFX300 is ideal for a wide variety of applications, including orchard and field irrigation, environmental control, crop cooling and dust control. Constructed of engineered thermoplastic materials for durability and weather resistance, the sprinkler features a simple, three-part snap in place design for easy field maintenance.




Designed for high efficiency, easy maintenance, and operational flexibility

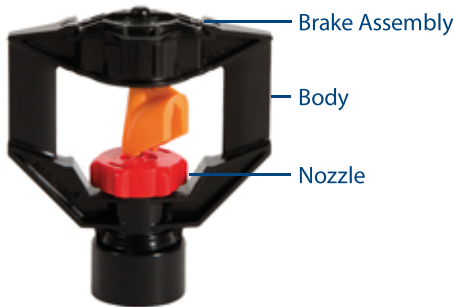

- Three-part assembly with top mounted nozzles and brake assembly make field maintenance simple
- Nozzles and brake assemblies universally fit into LFX body for easy customization and visual indicators on both parts ensure parts positioned correctly
- Two body options and selection of mounting hardware make LFX sprinkler perfect for retrofit or new installations
- Color coded nozzles and deflectors allow for easy field identification

Upgrade to Flow Control nozzles to control water application rate across pressure range

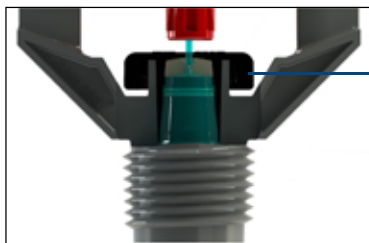

FC Nozzle
(Shown with pressure)

- Regulate water flow over pressure variation to provide a consistent application rate along lateral or across terrain variation
- Two flow rates available: 0.35gpm (79.5 l/h) or 0.50gpm (113.6 l/h)
- Operating range from 25 to 50 psi (1.72 to 3.45 bar)
- Flow control mechanism contained in nozzle, installs in standard body, no special parts required

How to Order

