

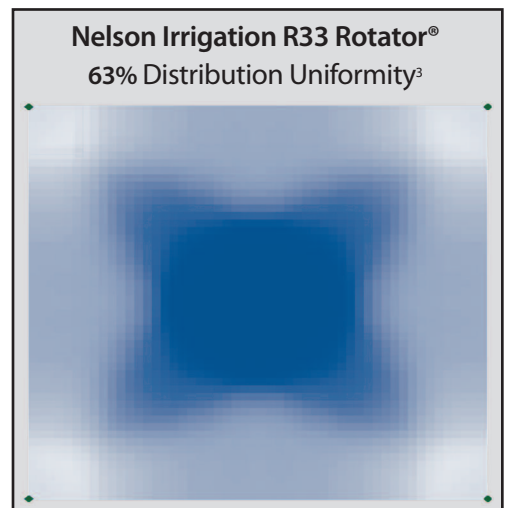


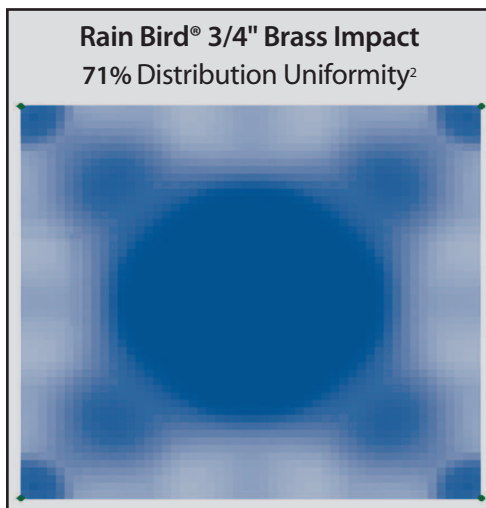

Rain Bird® LF™ 2400 - Long Range Up to 50' (15m) Throws and 6.8 gpm (1,550 l/h) Flows

The New Standard for ¾" Sprinkler Applications

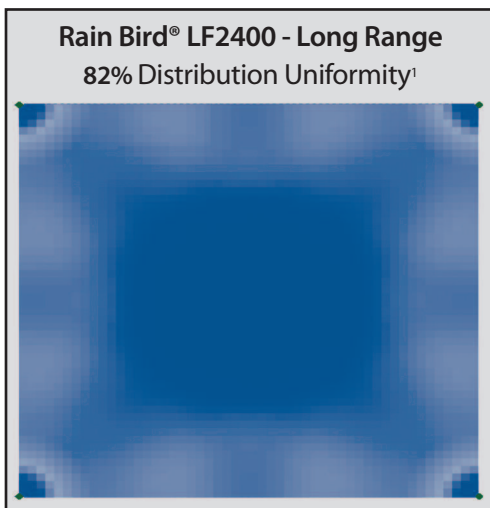

¹LF2400 with 9/64" nozzle, 27 deflector, 50' x 50' spacing, at 60 PSI, (15.2m x 15.2m at 4.2 bar)

²30 WH with 9/64" nozzle, 50' x 50' spacing, at 60 PSI, (15.2m x 15.2m at 4.2 bar)

³R33 with 9/64" nozzle, 50' x 50' spacing, at 60 PSI, (15.2m x 15.2m at 4.2 bar)

Unrivaled Performance at a Dramatically Lower Cost

The company that set the standard with the ¾" brass impact sprinkler now introduces technology that surpasses it. The Rain Bird LF2400 - Long Range provides unrivaled performance at a dramatically lower cost compared to similar brass and plastic sprinklers, making it the new standard for ¾" sprinkler applications.





Unrivaled Performance





- Superior Distribution Uniformity
 - Allows for higher yields and reduced irrigation costs
- Unmatched Durability
 - Based on the field-proven Rain Bird® LF™ Series Sprinkler
 - Backed by an **Industry Leading 5 Year Warranty**

Dramatically Lower Cost

- Keep more money in your pocket with dramatically lower cost compared to brass and other plastic ¾" sprinkler options
- Reduced chance of theft with plastic materials and Anti-Theft features



LF2400														
Deflector	Nozzle	Stream Height (inch)	Flow Rates at Standard Pressures (gpm) Throw Radius at Given Nozzle and Standard Pressure (feet)									Fully Assembled Part Number		
			25 psi	30 psi	35 psi	40 psi	45 psi	50 psi	55 psi	60 psi	1/2" NPT	ACME	3/4" NPT*	
27 Degree Black 118602 	Silver 9/64" .143" 11809809 	76-116	2.99 38	3.27 40	3.54 40	3.78 42	4.01 44	4.23 45	4.43 46	4.63 46	A85201C2709	A85203C2709	A85223C2709	
	Brown 5/32" .156" 11809810 	78-118	3.64 38	3.99 40	4.31 42	4.60 44	4.88 44	5.15 45	5.40 46	5.64 46	A85201C2710	A85203C2710	A85223C2710	
	Dark Grey 11/64" .172" 11809811 	80-120	4.40 40	4.82 42	5.21 44	5.57 47	5.91 48	6.23 48	6.53 48	6.82 50	A85201C2711	A85203C2711	A85223C2711	

LF2400 - Metric Units														
Deflector	Nozzle	Stream Height (cm)	Flow Rates at Standard Pressures (l/h) Throw Radius at Given Nozzle and Standard Pressure (m)									Fully Assembled Part Number		
			1.7 bar	2.1 bar	2.4 bar	2.8 bar	3.1 bar	3.5 bar	3.8 bar	4.2 bar	1/2" NPT	ACME	3/4" NPT*	
27 Degree Black 118602 	Silver 9/64" 3.63mm 11809809 	193-295	679 11.6	743 12.2	804 12.2	859 12.8	911 13.4	961 13.7	1,006 14.0	1,052 14.0	A85201C2709	A85203C2709	A85223C2709	
	Brown 5/32" 3.97mm 11809810 	198-300	827 11.6	906 12.2	979 12.8	1,045 13.4	1,108 13.4	1,170 13.7	1,226 14.0	1,281 14.0	A85201C2710	A85203C2710	A85223C2710	
	Dark Grey 11/64" 4.37mm 11809811 	203-305	999 12.2	1,095 12.8	1,183 13.4	1,265 14.3	1,342 14.6	1,415 14.6	1,483 14.6	1,549 15.2	A85201C2711	A85203C2711	A85223C2711	

ACME x 3/4" Male NPT Adapter - Part Number: 118297
 ACME x 20mm x 25mm Female Slip Adapter - Part Number: 118294

*ACME thread w/ 3/4" NPT Adapter



Rain Bird Agri-Products
 970 West Sierra Madre Avenue
 Azusa, CA 91702
 Phone: (800) HELLO-AG (1-800-435-5624)
 Fax: (626) 812-3411
 Email: agcustomerservice@rainbird.com

Rain Bird Corporation
 6991 E. Southpoint Road
 Tucson, AZ 85756
 Phone: (520) 741-6100
 Fax: (520) 741-6522

Rain Bird International, Inc.
 970 West Sierra Madre Ave.
 Azusa, CA 91702
 Phone: (626) 963-9311
 Fax: (626) 852-7343