


LFX™ and LF™ Low Flow Sprinkler Comparison



LFX300




- Operating Pressure:
- 25-50 psi (1.72-3.45 bar)
- Flow Rate:
- 0.28-0.73 gpm (62-161 l/h)
- Throw Distance:
- 15-25 feet (5.5-7.6 m)
- Deflector Trajectory:
- 9°, 15°

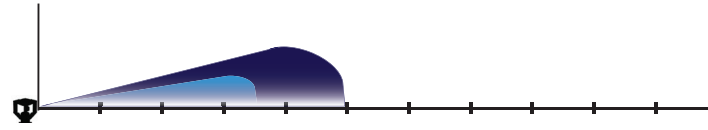

LFX600




- Operating Pressure:
- 25-50 psi (1.72-3.45 bar)
- Flow Rate:
- 0.61-2.12 gpm (140-469 l/h)
- Throw Distance:
- 22-31 feet (6.7-9.4 m)
- Deflector Trajectory:
- 9°, 12°, 15°

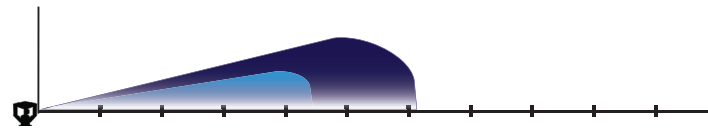

LF1200




- Operating Pressure:
- 25-60 psi (1.72-4.2 bar)
- Flow Rate:
- 0.97-2.53 gpm (220-575 l/h)
- Throw Distance:
- 22-37 feet (6.7-11.1 m)
- Deflector Trajectory:
- 6°, 10°, 12°, 16°, 17°, 21°

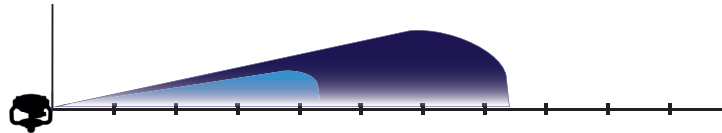

LF2400



- Operating Pressure:
- 25-60 psi (1.72-4.2 bar)
- Flow Rate:
- 1.69-4.02 gpm (384-913 l/h)
- Throw Distance:
- 27-45 feet (8.1-13.5 m)
- Trajectory:
- 10°, 13°, 15°, 22°

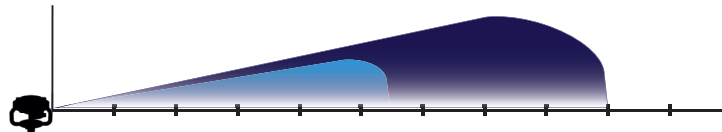

LF2400 LR



- Operating Pressure:
- 25-60 psi (1.72-4.2 bar)
- Flow Rate:
- 2.93-6.82 gpm (665-1549 l/h)
- Throw Distance:
- 38-50 feet (11.6-15.2 m)
- Deflector Trajectory:
- 27°

