


XFS Dripline With Copper Shield™ Technology

Dripline Series

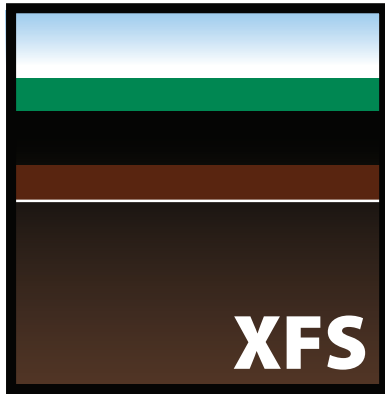

SUB-SURFACE

Applications

Rain Bird® XFS Dripline with Copper Shield™ for sub-surface drip irrigation is the latest innovation in the Rain Bird Xerigation™ Family. Rain Bird's patent-pending Copper Shield™ Technology protects the emitter from root intrusion, creating a long-lasting, low maintenance sub-surface drip irrigation system for use under turf grass or shrub and groundcover areas. XFS Series Dripline with Copper Shield™ is perfect for small, narrow and tight planting areas, as well as areas with tight curves or many switchbacks.

It accepts Rain Bird Easy Fit Compression Fittings, XFF Dripline Barbed Insert Fittings and other 17 mm barbed insert fittings.

Features

Simple

- Rain Bird's patent pending shiny metallic copper-colored XFS dripline with Copper Shield™ Technology protects the emitter from root intrusion with out requiring EPA-approved handling procedures - unlike some manufacturers who use harsh chemicals or treated filters to protect the emitter from root intrusion
- Through the use of a proprietary tubing material, the shiny metallic copper-colored XFS Dripline with Copper Shield™ is the most flexible dripline tubing in the industry making it the easiest sub-surface dripline to design with and install

- It accepts Rain Bird Easy Fit Compression Fittings, XFF Dripline Barbed Insert Fittings and other 17 mm barbed insert fittings
- Rain Bird's low-profile emitter design reduces in-line pressure loss, allowing longer lateral runs, simplifying design and reducing installation time
- Variety of emitter flow rates, emitter spacing and coil lengths provide design flexibility for either sub-surface turf grass or sub-surface shrub and groundcover applications

Reliable

- XFS emitters are protected from root intrusion by Rain Bird's patent-pending Copper Shield™ Technology resulting in a system that does not require maintenance or replacement of chemicals to prevent root intrusion
- The pressure-compensating emitter design provides a consistent flow over the entire lateral length ensuring higher uniformity for increased reliability in the pressure range of 8.5 to 60 psi

Durable

- Dual-layered tubing (copper over black) provides unmatched resistance to chemicals, algae growth and UV damage
- Grit Tolerant: Rain Bird's proprietary emitter design resists clogging by use of an extra-wide flow path combined with a self-flushing action

Operating Range

- **Pressure:** 8.5 to 60 psi (,58 to 4,14 bar)
- **Flow rates:** 0.42, 0.6 and 0.9 gph (1,6 l/h, 2,3 l/hr and 3,5 l/hr)
- **Temperature:**
Water: Up to 100°F (37,8° C)
Ambient: Up to 125°F (51,7° C)
- **Required Filtration:** 120 Mesh

Specifications


- **OD:** 0.634"
- **ID:** 0.536"
- **Thickness:** 0.049"
- **12", 18"** (30,5 cm, 45,7 cm) spacing
- **Available in 100' and 500'** (30,5 m and 152,4 m) coils
- **Coil Color:** Copper, Purple, Copper with Purple Stripe



XFS Dripline Models

XFS-04-12-500	XFSP-04-12-500
XFS-04-18-500	XFSP-04-18-500
XFS-06-12-100	XFSP-06-12-500
XFS-06-12-500	XFSP-06-18-500
XFS-06-18-100	XFSP-09-12-500
XFS-06-18-500	XFSP-09-18-500
XFS-09-12-100	XFSPS-04-125
XFS-09-12-500	XFSPS-04-185
XFS-09-18-100	XFSPS-06-125
XFS-09-18-500	XFSPS-06-185
XF Blank tubing also available in brown, purple, and purple stripe colors	XFSPS-09-125
	XFSPS-09-185


How To Specify

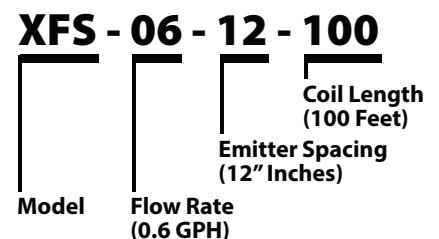

XFSP = Purple to indicate models that use non-potable water
XFSPS = Purple stripe to indicate models that use non-potable water

XFS Dripline With Copper Shield™ Technology

Dripline Series

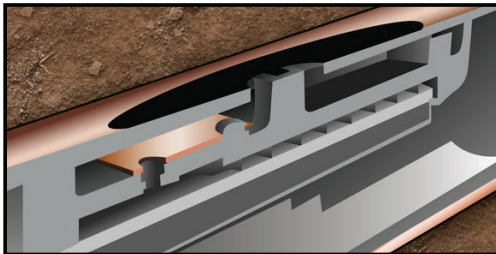

Specifications

The flexible, shiny metallic copper-colored polyethylene tubing shall have factory installed pressure-compensating, inline emitters spaced evenly per listed spacing. The flow rate from each installed inline emitter shall be 0.4, 0.6 or 0.9 gallons per hour when inlet pressure is between 8.5 and 60 psi.

The inline emitter diaphragm shall have a pressure-regulating diaphragm with a spring action allowing it to self-rinse if there is a plug at the outlet hole. The flexible tubing allows for easy non-linear installations. The inline emitter shall have copper shield technology installed to protect the emitter from root intrusion. The inline emitter inlet shall be raised off the inside tube wall to minimize dirt intrusion.

The XFS Dripline inline tubing shall be manufactured by Rain Bird Corporation, Azusa, California.

XFS Dripline Maximum Lateral Length (Feet)

Inlet Pressure psi	Maximum Lateral Length (feet)		
	12" Spacing		
	Nominal Flow (GPH):		
	0.42	0.6	0.9
15	352	273	155
20	399	318	169
30	447	360	230
40	488	395	255
50	505	417	285
60	573	460	290

18" Spacing

	Nominal Flow (GPH):		
	0.42 0.6 0.9		
	0.42	0.6	0.9
15	374	314	250
20	417	353	294
30	481	413	350
40	530	465	402
50	610	528	420
60	734	596	455

XFS Dripline Maximum Lateral Length (Meters)

Inlet Pressure bars	Maximum Lateral Length (meters)		
	30.5 cm Spacing		
	Nominal Flow (l/h):		
	1.6	2.3	3.5
1.0	107.2	83.2	47.2
1.4	121.6	96.9	51.5
2.1	136.2	109.7	70.1
2.8	148.7	120.4	77.7
3.5	153.9	127.1	86.9
4.1	174.6	140.2	88.4

45.7 cm Spacing

	Nominal Flow (l/h):		
	1.6 2.3 3.5		
	1.6	2.3	3.5
1.0	114	95.7	76.2
1.4	127.1	107.6	89.6
2.1	146.6	125.9	106.7
2.8	161.5	141.7	122.5
3.5	185.9	160.9	128.0
4.1	223.7	181.7	138.7

LEED Compliant



Contains at least 20% post consumer recycled polyethylene which qualifies for LEED credit 4.2



**Rain Bird's Professional
Customer Satisfaction Policy**

**XF Series Dripline offers five (5) years on product workmanship
and seven (7) years on environmental stress cracking**

Rain Bird Corporation
6991 E. Southpoint Road
Tucson, AZ 85756
Phone: (520) 741-6100
Fax: (520) 741-6522

Rain Bird Corporation
970 West Sierra Madre Avenue
Azusa, CA 91702
Phone: (626) 812-3400
Fax: (626) 812-3411

Rain Bird International, Inc.
1000 West Sierra Madre Ave.
Azusa, CA 91702
Phone: (626) 963-9311
Fax: (626) 852-7343

Rain Bird Technical Services
(800) RAINBIRD (1-800-724-6247)
(U.S. and Canada)

The Intelligent Use of Water™
www.rainbird.com