



QF Dripline Header

A Quick and Flexible Solution to Dripline Headers



Applications

The QF Dripline Header is an innovative product developed by the Rain Bird Landscape Drip Division to be a replacement for site-built headers in dripline installations. Its performance characteristics match PVC in terms of flow and pressure ratings. This Quick and Flexible product was specifically designed to eliminate the high labor costs and hassle associated with site-built headers. The flexibility and durability of the QF Header makes it ideal for curved or non-linear landscapes, making installation quick and easy.

Features

Performance

The QF Header has comparable design characteristics to a PVC header using the 5ft per second rule. It has similar volume and pressure performance to ensure proper flow to the dripline grid or other drip irrigation systems.

Operating Range:

- Pressure: 0 to 50 psi (0,0 to 4,14 bar)
- Temperature:
 - Water: Up to 100° F (37,8° C)
 - Ambient: Up to 125° F (51,7° C)

Flexibility

Patent-pending QF Header is the ONLY coiled header on the market. Made of a proprietary, dual-layered polyethylene blend for optimal flexibility. This product is ideal for curved or non-symmetrical landscapes and makes installation quick and easy. Simply roll out, connect to a water source and attach the dripline; it's that simple.

360° Pre-Installed XF Series Rotating Elbows

No other product has pre-installed elbows that ensure guaranteed spacing. The 360° rotating elbows allow for trenching misalignment – no need to re-trench, simply rotate the elbows slightly to accommodate the dripline.

Utilizes the XF Series Fitting elbow design, which requires 50% less force to insert – resulting in less hand and wrist fatigue.

A protective ring surrounds the elbow, protecting it from damage and ensuring a proper seal. The ring also provides leverage when holding the elbow and attaching the dripline.


Models

XQF7512100: XQF 3/4" Dripline Header (12" Spacing 100' Coil)

XQF7518100: XQF 3/4" Dripline Header (18" Spacing 100' Coil)

XQF1012100: XQF 1" Dripline Header (12" Spacing 100' Coil)

XQF1018100: XQF 1" Dripline Header (18" Spacing 100' Coil)

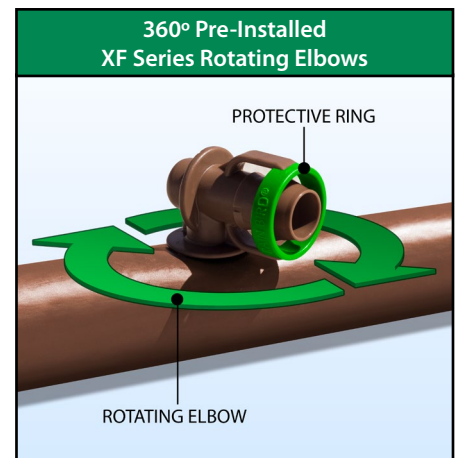

*Ring is colored green for illustrative purposes only

How To Specify

XQF	75	12	100
			Coil Length: 100 = 100'
		Emitter Spacing: 12 = 12"	
		18 = 18"	
	Dripline Diameter: 75 = 3/4"		
	10 = 1"		
Xerigation Quick Flexible			

Specifications

The flexible, pre-manufactured header shall be made of polyethylene tubing and shall have factory installed elbows for use with any 16-17mm drip irrigation tubing. The elbows shall be spaced evenly per listed spacing (either 12 inch or 18 inch spacing). The polyethylene tubing shall be either 0.75 inch or 1 inch and work with industry standard fittings for polyethylene tubing, including: lock-style fitting, compression fittings, or insert style fittings (with clamp). The pre-manufactured header should be supplied in 100 foot long coils. The flexible tubing allows for easy non-linear installations and shall conform to a 15 inch radius without kinking. The QF Dripline Header inline tubing shall be manufactured by Rain Bird Corporation, Azusa, California.

XQF 3/4" Dripline Header

Models:

- XQF-75-12-100
- XQF-75-18-100

Relevant Dimensions:

Outer Diameter: 0.940"
 Inside Diameter: 0.820"
 Wall Thickness: 0.060"

XQF 1" Dripline Header

Models:


- XQF-10-12-100
- XQF-10-18-100

Relevant Dimensions:

Outer Diameter: 1.200"
 Inside Diameter: 1.060"
 Wall Thickness: 0.070"

Fittings Guide

The QF Dripline Header is designed to work with Rain Bird's all-new TLF Series - Twist Lock Fittings (3/4" and 1" fitting models) which provide an even tighter seal on tubing by using high quality elbows and twist locking nuts.

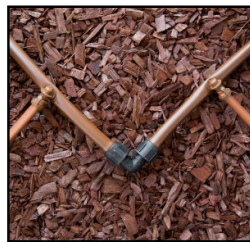

Twist Lock Fittings - 800 Series
 (For use on 3/4" QF Header)



Twist Lock Fittings - 1000 Series
 (For use on 1" QF Header)

QF Dripline Header™
 THE INDUSTRY'S FIRST PRE-FABRICATED HEADER / EXHAUST
QUICK. FLEXIBLE. EASY. NOW THAT'S INTELLIGENT.



**Rain Bird's Professional
 Customer Satisfaction Policy**

**Rain Bird QF Dripline Header offers five (5) years on product
 workmanship and seven (7) years on environmental stress cracking**

Rain Bird Corporation
 6991 E. Southpoint Road
 Tucson, AZ 85756
 Phone: (520) 741-6100
 Fax: (520) 741-6522

Rain Bird Technical Services
 (800) RAINBIRD (1-800-724-6247)
 (U.S. and Canada)

Rain Bird Corporation
 970 West Sierra Madre Avenue
 Azusa, CA 91702
 Phone: (626) 812-3400
 Fax: (626) 812-3411

Specification Hotline
 800-458-3005 (U.S. and Canada)

Rain Bird International, Inc.
 1000 West Sierra Madre Ave.
 Azusa, CA 91702
 Phone: (626) 963-9311
 Fax: (626) 852-7343

The Intelligent Use of Water™

www.rainbird.com